

RE- Cost Effectively , Cabling Cabinet



SPICIFICATIONS

1. Comply with ANSI/EIA-RS-310-D/DIN41491; IEC297-2; DIN41494, PART7, GB/T3047.2-92 standard, compatible with 19" international standard, metric system and ETSI standard.
2. Reliable structure, static loading capacity: 300KG.
3. Install castor and support feet, move easily, firm;
4. International popular color tempered glass door;
5. Baying together easy, quickly, efficiently and firmly.
6. Install side panel and rear door, assembly and repair easily to lock.
7. Bottom cable entry , size can adjust according to the requirement;
8. Varies optional accessories, reliable quality.

Material:

SPCC cold rolling steel plate,
mounting angle: 2.0mm, frame, front door 1.2mm,
others 0.8mm



Front - Glass Door Rear - Single side door

1U = 44.45mm = 1.75"

Accessories

Fixed Shelf Sliding Shelf K/B Drawer

Fixed Shelf(30kg) Sliding Shelf(25kg) 1U Keyboard Drawer



Model	U	H	W	D	Fixed Shelf	AC Fans	M6 Screw
RE6618B	18	988	600	600	1	2	20
RE6622B	22	1163	600	600	1	2	20
RE6627B	27	1388	600	600	1	2	20
RE6632B	32	1610	600	600	1	2	20
RE6637B	37	1833	600	600	1	2	40
RE6642B	42	2055	600	600	1	2	40

RS- Glass Door Server Cabinet



SPICIFICATIONS

STANDARDS Meet ANSI/EIA RS-310-D
DIN41491/PART1/ IEC297/PRAT7/GB/T3047
requirement Compatible with 19"International
Standard, the ETSI Standard

FEATURES

- *Steel Frame
- *Tempered glass front and rear door
- *Removable side door
- *Max. Static load 800Kg.

MATERIALS

- *SPCC high-quality cold roll steel
- *Thickness: Mounting Rails 2.0mm
- *Mounting angle 1.5mm others 1.2mm




Front Door Rear Door

1U = 44.45mm = 1.75"

Accessories

Fixed Shield Sliding Shelf K/B Drawer

NFS60B/80B/90B/100B SS60B/80B/100B UKBDB

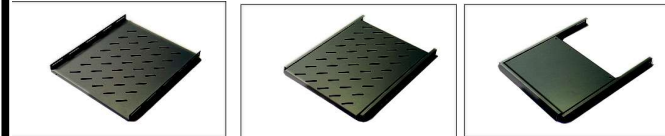

Model	U	H	W	D	Fixed Shelf	AC Fan	M6 Screw
RS6618B	18	988	600	600	1	2	20
RS6818B			600	800	1	4	20
RS6622B	22	1163	600	600	1	2	20
RS6822B			600	800	1	4	20
RS6922B			600	900	1	4	20
RS6022B			600	1000	1	4	20
RS6627B	27	1388	600	600	1	2	20
RS6827B			600	800	1	4	20
RS6927B			600	900	1	4	20
RS6027B	32	1610	600	1000	1	4	20
RS6632B			600	600	1	2	20
RS6832B			600	800	1	4	20
RS6932B			600	900	1	4	20
RS6032B	37	1833	600	1000	1	4	20
RS6637B			600	600	1	2	40
RS6837B			600	800	1	4	40
RS6937B			600	900	1	4	40
RS6037B	42	2055	600	1000	1	4	40
RS6642B			600	600	1	2	40
RS6842B			600	800	1	4	40
RS6942B			600	900	1	4	40
RS6042B			600	1000	1	4	40

RV- Vented Door Server Cabinet



SPICIFICATIONS

STANDARDS Meet ANSI/EIA RS-310-D
DIN41491/PART1/ IEC297/PRAT7/GB/T3047
requirement Compatible with 19"International
Standard, the ETSI Standard

FEATURES

- *Steel Frame
- *Vented Hole front and rear door
- *Removable side door
- *Max. Static load 800Kg.

MATERIALS

- *SPCC high-quality cold roll steel
- *Thickness: Mounting Rails 2.0mm
- *Mounting angle 1.5mm others 1.2mm



Front Door Rear Door

1U = 44.45mm = 1.75"

Accessories

Fixed Shield Sliding Shelf K/B Drawer

NFS60B/80B/90B/100B SS60B/80B/100B UKBDB



Model	U	H	W	D	Fixed Shelf	AC Fan	M6 Screw
RV6618B	18	988	600	600	1	2	20
RV6818B			600	800	1	4	20
RV6622B	22	1163	600	600	1	2	20
RV6822B			600	800	1	4	20
RV6922B			600	900	1	4	20
RV6022B			600	1000	1	4	20
RV6627B	27	1388	600	600	1	2	20
RV6827B			600	800	1	4	20
RV6927B			600	900	1	4	20
RV6027B	32	1610	600	1000	1	4	20
RV6632B			600	600	1	2	20
RV6832B			600	800	1	4	20
RV6932B			600	900	1	4	20
RV6032B	37	1833	600	1000	1	4	20
RV6637B			600	600	1	2	40
RV6837B			600	800	1	4	40
RV6937B			600	900	1	4	40
RV6037B	42	2055	600	1000	1	4	40
RV6642B			600	600	1	2	40
RV6842B			600	800	1	4	40
RV6942B			600	900	1	4	40
RV6042B			600	1000	1	4	40